

**Product Code:**

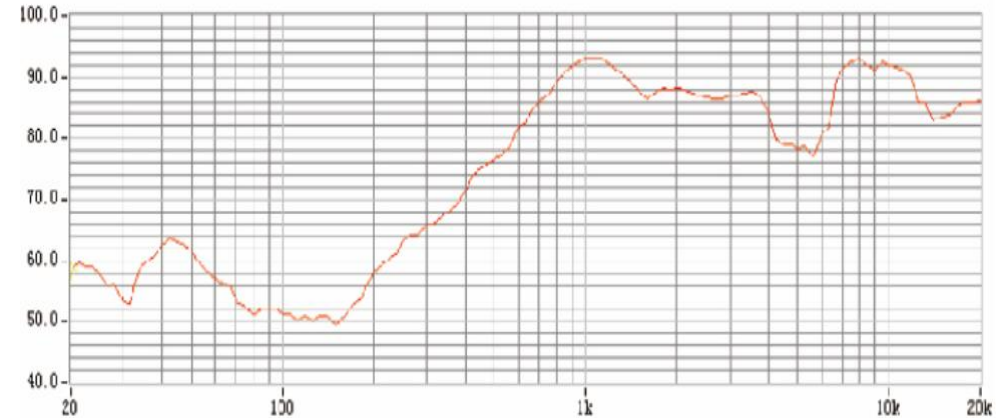
LDMS1540S-01-R8-0.8-R


**Picture:**

**Specification:**

Rated Power	(W)	0.5
Max Input Power	(W)	0.8
Rated Impedance	( $\Omega$ )	$8 \pm 15\%$
Resonance Frequency	(Hz)	$800 \pm 20\%$
SPL at 0.1m 0.5W	(dB)	$87 \pm 3$ at 1k,1.6k,2k,3.2kHz average
Rated Freq. Range	(Hz)	$f_0 \sim 6000$
Buzzes & Rattles		Should not be audible at 2V sine wave between 300~6000Hz
Operating Temperature	( $^{\circ}\text{C}$ )	$-30 \sim +85$
Storage Temperature	( $^{\circ}\text{C}$ )	$-40 \sim +105$
Weight	(g)	1.5
RoHS		Yes

 Test basic state: Temp( $20 \pm 2^{\circ}\text{C}$ ) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**Frequency Response:**

**Dimensions (Unit: mm)**

 Tolerance:  $\pm 0.5\text{mm}$  Except Specified
