

Product Code:

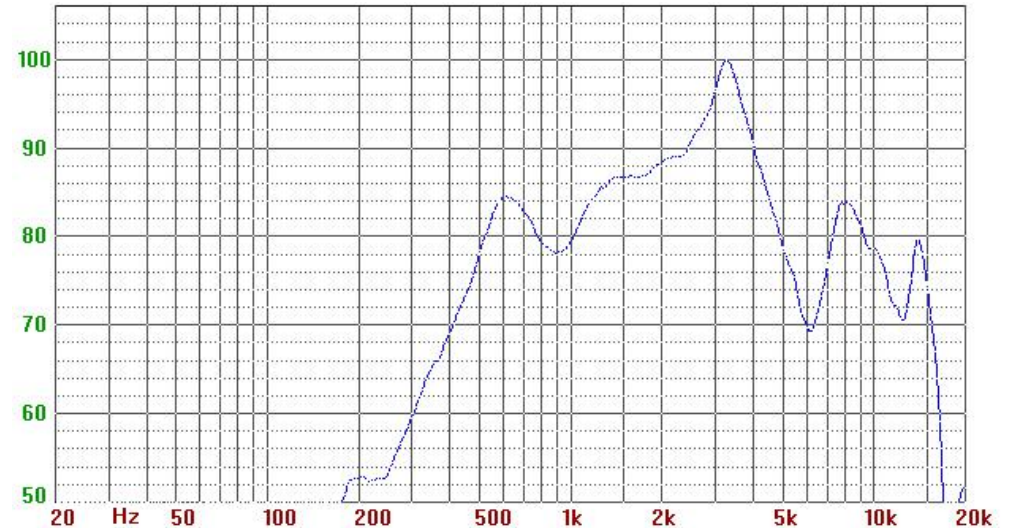
LDMS4052B-02-R8-0.6-R1


Picture:

Specification:

Rated Power	(W)	0.5W
Max Input Power	(W)	0.8W
Rated Impedance	(Ω)	8±20%@1V, 2KHz
Resonance Frequency	(Hz)	600±20%Hz@1V
SPL at 0.1m 0.1W	(dB)	87±3dB at 0.8k,1.0k,1.2k&1.5kHz Average
Rated Freq. Range	(Hz)	f ₀ ~6KHz
Buzzes & Rattles		Should not be audible at 2.0V sine wave between f ₀ ~6KHz
Operating Temperature	(°C)	-20°C ~ +50°C
Storage Temperature	(°C)	-30°C ~ +60°C
Weight	(g)	9.2
RoHS		Yes

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Frequency Response:

Dimensions (Unit: mm)

Tolerance: ±0.5mm Except Specified

