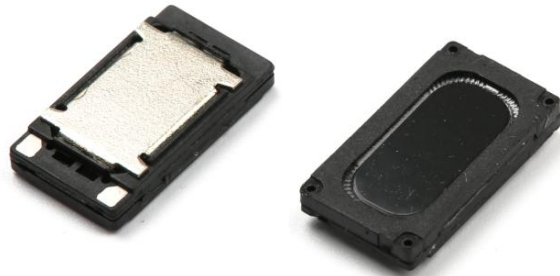



**Product Code:**

LDMSC1609B-H3-R8-1.05-R4


**Picture:**

**Specification:**

Rated Power	(W)	0.7W
Max Input Power	(W)	1.0W
Rated Impedance	(Ω)	8±20%@1V, 1KHz
Resonance Frequency	(Hz)	1050±20%Hz
SPL at 0.1m 0.125W	(dB)	76±3dB at 2.0kHz
Rated Freq. Range	(Hz)	f0~10KHz
Buzzes & Rattles		Should not be audible at 2.0V sine wave between 300Hz~10KHz
Operating Temperature	(°C)	-30°C ~ +70°C
Storage Temperature	(°C)	-40°C ~ +85°C
Weight	(g)	1.5g
RoHS		Yes

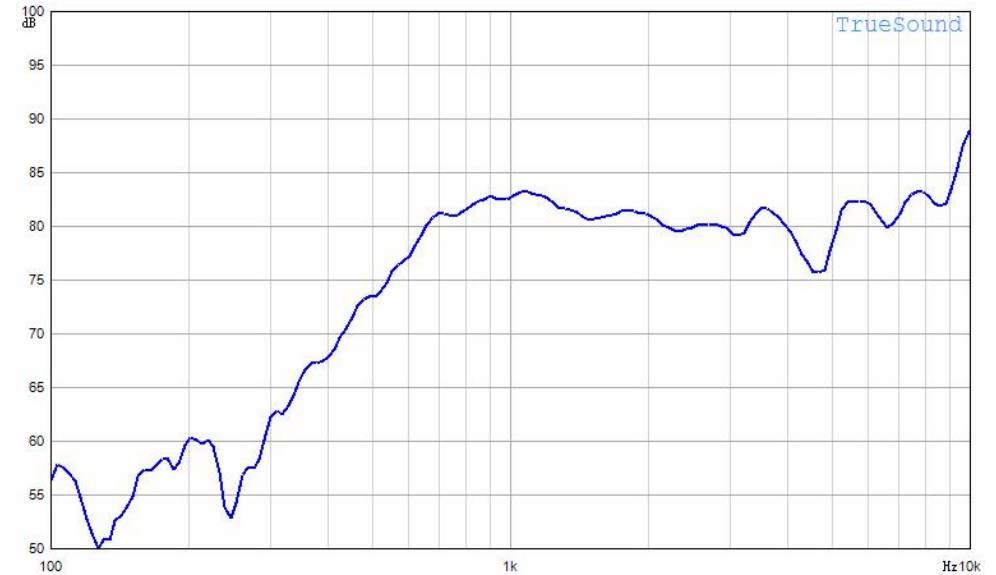Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**Frequency Response:**

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

