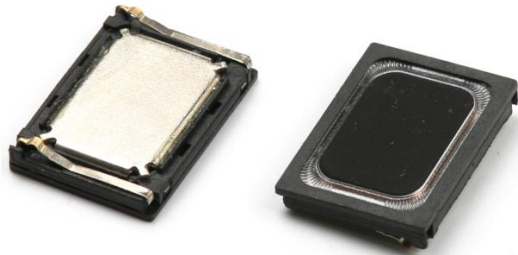



Product Code:

LDMSC1813AS-H2.5-R8-0.9-R4


Picture:

Specification:

Rated Power	(W)	0.5W
Max Input Power	(W)	0.8W
Rated Impedance	(Ω)	8 \pm 20%@1V, 1KHz
Resonance Frequency	(Hz)	900 \pm 20%Hz
SPL at 0.1m 0.125W	(dB)	83 \pm 3dB at 2.0kHz
Rated Freq. Range	(Hz)	f ₀ ~10KHz
Buzzes & Rattles		Should not be audible at 2.0V sine wave between 300Hz~10KHz
Operating Temperature	($^{\circ}$ C)	-30 $^{\circ}$ C ~ +70 $^{\circ}$ C
Storage Temperature	($^{\circ}$ C)	-40 $^{\circ}$ C ~ +85 $^{\circ}$ C
Weight	(g)	1.8g
RoHS		Yes

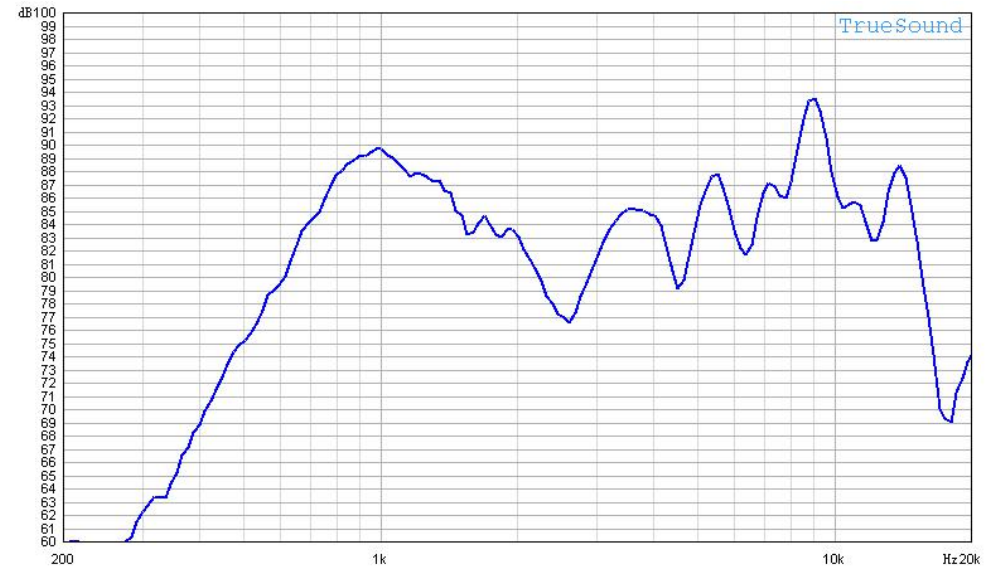 Test basic state: Temp(20 \pm 2 $^{\circ}$ C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Frequency Response:

Dimensions (Unit: mm)

 Tolerance: \pm 0.5mm Except Specified
