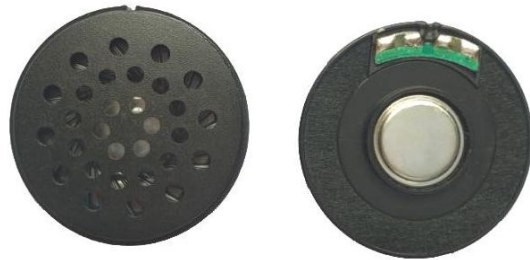


**Product Code:**


LSDR4012-01-R32-0.3-R2


 RoHS  
Compliant

**Picture:**

**Specification:**

Rated Power	(W)	0.05W
Max Input Power	(W)	0.1W
Rated Impedance	(Ω)	32±20%@1V, 2KHz
Resonance Frequency	(Hz)	300±20%Hz@1V
Sound Output at 0.1m 0.05W	(dB)	92±3dB at 1.0kHz
Rated Freq. Range	(Hz)	f0~10KHz
Buzzes & Rattles		Should not be audible at 1.5V sine wave between 300Hz~6KHz
Operating Temperature	(°C)	-20°C ~ +50°C
Storage Temperature	(°C)	-30°C ~ +60°C
Weight	(g)	7g
RoHS		Yes

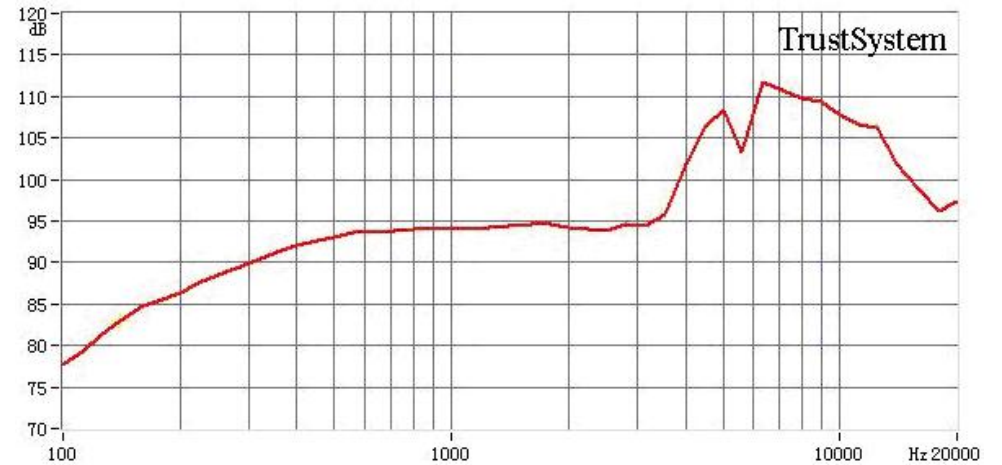Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**Frequency Response:**

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

