

**Product Code:**

XD-2308-R

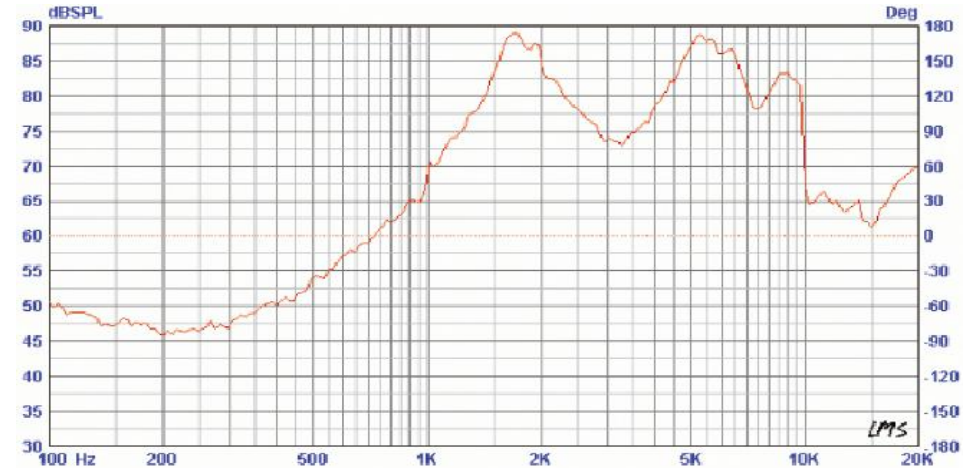

 RoHS  
Compliant

**Picture:**

**Specification:**

Rated Power	(W)	0.15
Max Input Power	(W)	0.2
Rated Impedance	( $\Omega$ )	$8 \pm 20\%$ at 1KHz
Resonance Frequency	(Hz)	$1500 \pm 20\%$
SPL at 0.1m 0.1W	(dB)	$\geq 80$ @1500Hz,sine wave
Rated Freq. Range	(Hz)	500~4000
Buzzes & Rattles		Should not be audible at 2V sine wave between 300~6000Hz
Operating Temperature	( $^{\circ}\text{C}$ )	-20~+60
Storage Temperature	( $^{\circ}\text{C}$ )	-30~+70
Weight	(g)	3.0
RoHS		Yes

 Test basic state: Temp( $20 \pm 2^{\circ}\text{C}$ ) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**Frequency Response:**

**Dimensions (Unit: mm)**

 Tolerance:  $\pm 0.5\text{mm}$  Except Specified
