

Product Code:

LPB3016AZ-GB-12-3.5-17.5-R


Picture:

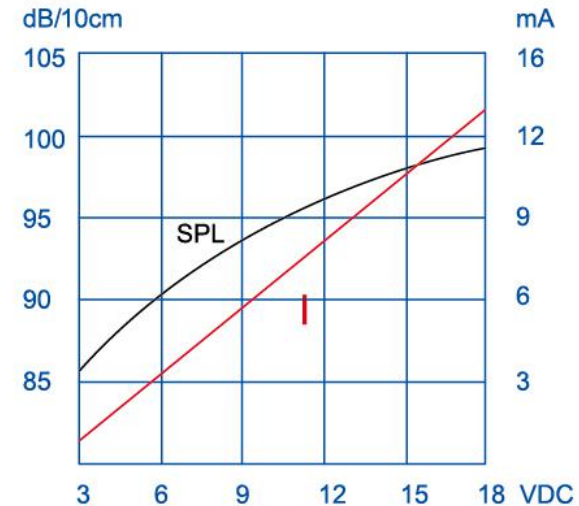
Specification:

| | | |
|-----------------------|-------|------------|
| Rated Voltage | (VDC) | 12 |
| Operating Voltage | (VDC) | 3~16 |
| *Rated Current | (mA) | ≤12 |
| *Sound Output at 30cm | (dB) | ≥95 |
| *Resonance Frequency | (KHz) | 3.5±0.5 |
| Tone | | Continuous |
| Operating Temperature | (°C) | -40~+85 |
| Storage Temperature | (°C) | -40~+90 |
| Weight | (g) | 8 |
| Housing Material | | PBT |
| RoHS | | Yes |

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

SPL & Current Consumption vs. Input Voltage:

Dimensions (Unit: mm)

Tolerance: ±0.5mm Except Specified

