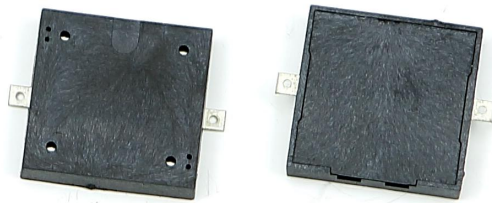


Product Code:

LPT1625BS-HL-03-4.0-16-R

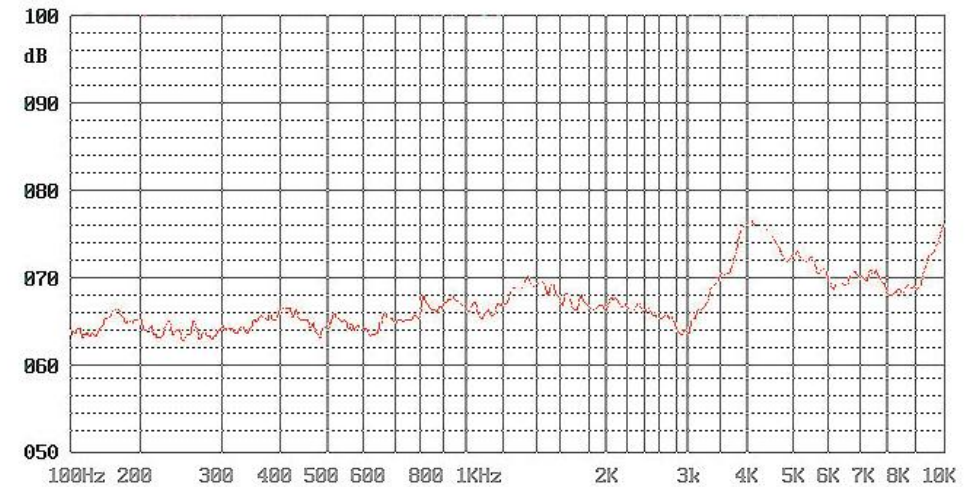

 RoHS
Compliant

Picture:

Specification:

Rated Voltage	(Vp-p)	3
Max Input Voltage	(Vp-p)	25
*Rated Current	(mA)	≤3
Capacitance at 100Hz	(pF)	16000±30%
*Sound Output at 10cm	(dB)	75
Resonance Frequency	(KHz)	4.0±0.5
Operating Temperature	(°C)	-40~+105
Storage Temperature	(°C)	-40~+120
Weight	(g)	0.8
Housing Material		LCP
RoHS		Yes
MSL(Moisture Sensitivity Level)		5a(≤30°C/60%RH 24H Floor life)

*Value applying at rated voltage , 4.0KHz , 1/2 duty , square wave

Test Basic State: Temp(20±2°C),Humidity(40~70%RH),Air pressure(860~1060hPa).

Frequency Response:

Dimensions (UNIT: mm)

Tolerance: ±0.5mm Except Specified

