

**Product Code:**

LPB1614-TB-12-4.0-7.6-R


**Picture:**

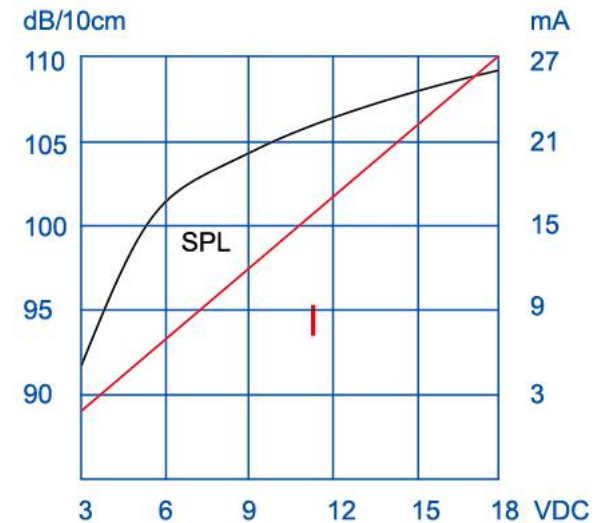
**Specification:**

Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3~16
*Rated Current	(mA)	≤12
*Sound Output at 10cm	(dB)	≥95
*Resonance Frequency	(KHz)	4.0±0.5
Tone		Continuous
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	1.35
Housing Material		PBT
RoHS		Yes

**Remark:** The special requirements in the test for no anti reverse connection.

\*Value applying at rated voltage.

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**SPL & Current Consumption vs. Input Voltage:**

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

