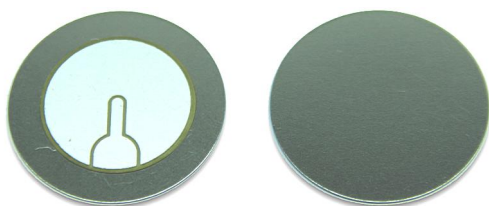


Product Code:

FT-35G-3.25B1


Picture:

Specification:

Resonant frequency	(KHz)	3.25±0.3
Resonant impedance	(Ω)	≤300
Capacitance at 1KHz	(pF)	26000±30%
Metal plate diameter (mm) (D)	(mm)	φ 35.0±0.2
Ceramic plate diameter (mm) (d)	(mm)	φ 25.0±0.5
sTotal thickness (mm) (T)	(mm)	0.57±0.06
Metal plate thickness (mm) (t)	(mm)	0.35±0.04
Metal material	Stainless Steel	
RoHS	Yes	

Test basic state:

Temp(20±2℃) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Environment Test:

ITEM	TESTING CONDITION		RECOVERY CONDITION
Humidity	40±2℃, 93(+2/-3)%RH, 96HRS		2 hour recovery under normal temp.
Temp. cycling	-10±2℃, room temp. +70±2℃, room temp.	30minutes 15 minutes 30 minutes 15 minutes 5 cycles	2 hour recovery under normal temp.
High temp.	+70±2℃,Not less than 30min		Measurement under high temp.
Low temp.	-10±2℃,Not less than 30min		Measurement under low temp.

Evaluation standard :

Change requirement on electrical performance:

Resonant frequency ±20%, Free capacitance ±30%

Dimensions:
