

Product Code:

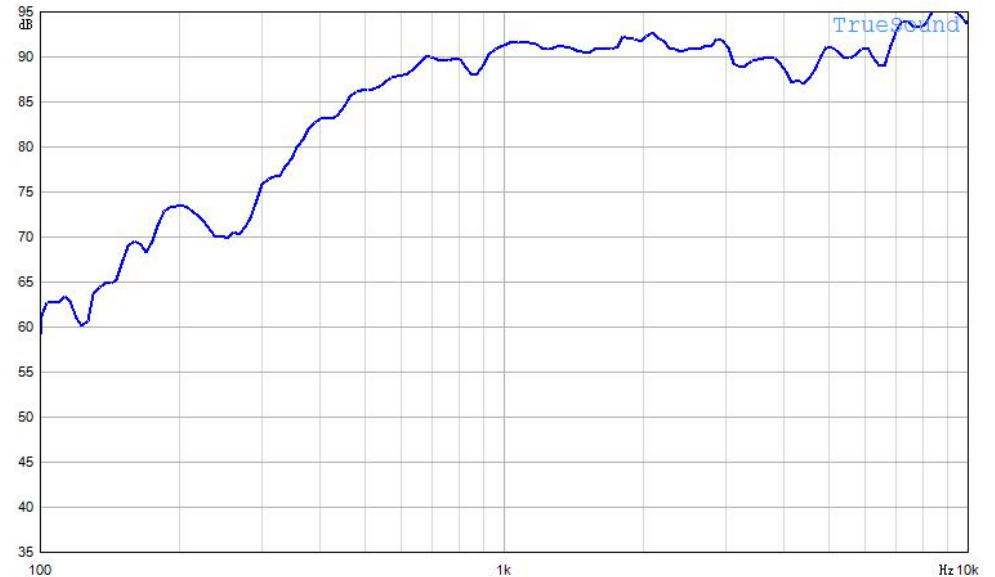
LDMSC2509B-H3-R8-0.63-R4


Picture:

Specification:

Rated Power	(W)	1.0W
Max Input Power	(W)	1.5W
Rated Impedance	(Ω)	$8 \pm 20\%$ @1V, 1KHz
Resonance Frequency	(Hz)	$630 \pm 20\%$ Hz
SPL at 0.1m 1.0W	(dB)	83 ± 3 dB at 2.0kHz
Rated Freq. Range	(Hz)	f ₀ ~ 10KHz
Buzzes & Rattles		Should not be audible at 2.0V sine wave between 300Hz ~ 10KHz
Operating Temperature	($^{\circ}$ C)	-30 $^{\circ}$ C ~ +70 $^{\circ}$ C
Storage Temperature	($^{\circ}$ C)	-40 $^{\circ}$ C ~ +85 $^{\circ}$ C
Weight	(g)	2.0g
RoHS		Yes

 Test basic state: Temp($20 \pm 2^{\circ}$ C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Frequency Response:

Dimensions (Unit: mm)

 Tolerance: ± 0.5 mm Except Specified
